


SECTION B-B
CONCRETE

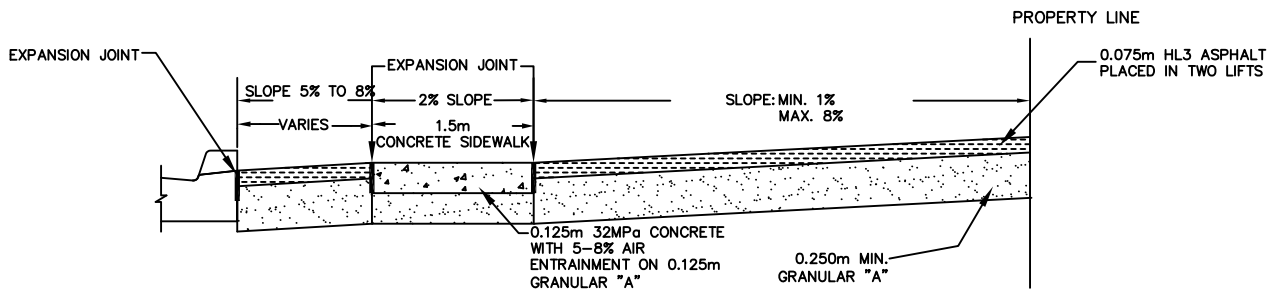

SECTION B-B
ASPHALT

NOTES:

1. All concrete shall be 32 MPa with 5.0% – 8.0% Air content and maximum slump of 70mm.
Saw cutting and breaking away not permitted.
2. Cast iron access caps required.
3. All dimensions are in metres unless otherwise shown.
4. Expansion joint required at curb for concrete approach.
5. Granular "A" to be compacted to 100% Standard Proctor Density.
6. Curb cuts to be made with approved curb cutting machine.
7. All concrete sidewalk surfaces to be broom finished and finished edged.
8. HL#3 asphalt to be compacted to 98% Standard Proctor Density.

RESIDENTIAL DRIVEWAY - URBAN WITH PLANNED SIDEWALK



DWG DATE:
May 26, 2016

REVISION DATE:

DWG NO:
302