

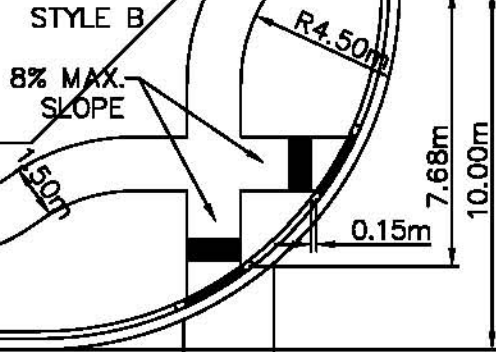
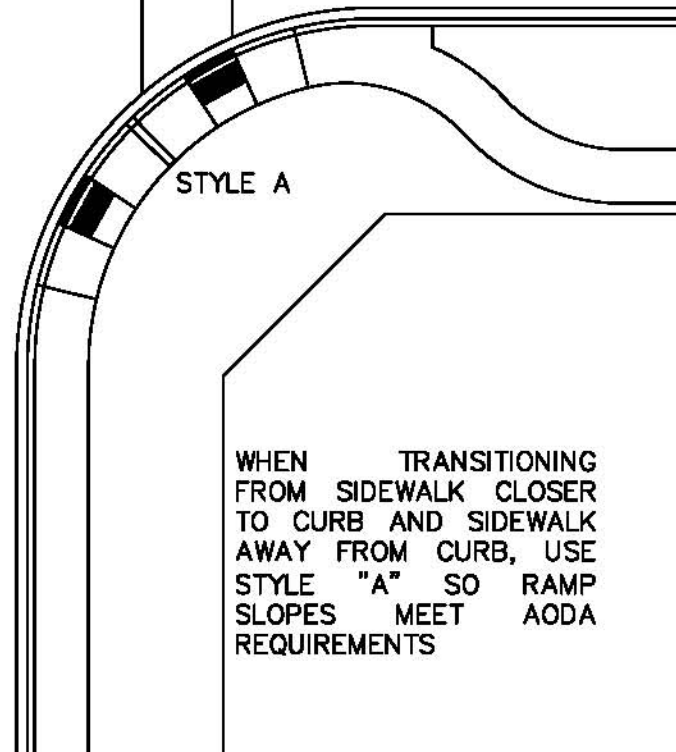


IF CENTRELINE OF SIDEWALK IS BETWEEN CENTRELINE OF BOULEVARD AND PROPERTY LINE USE STYLE "B OR C"

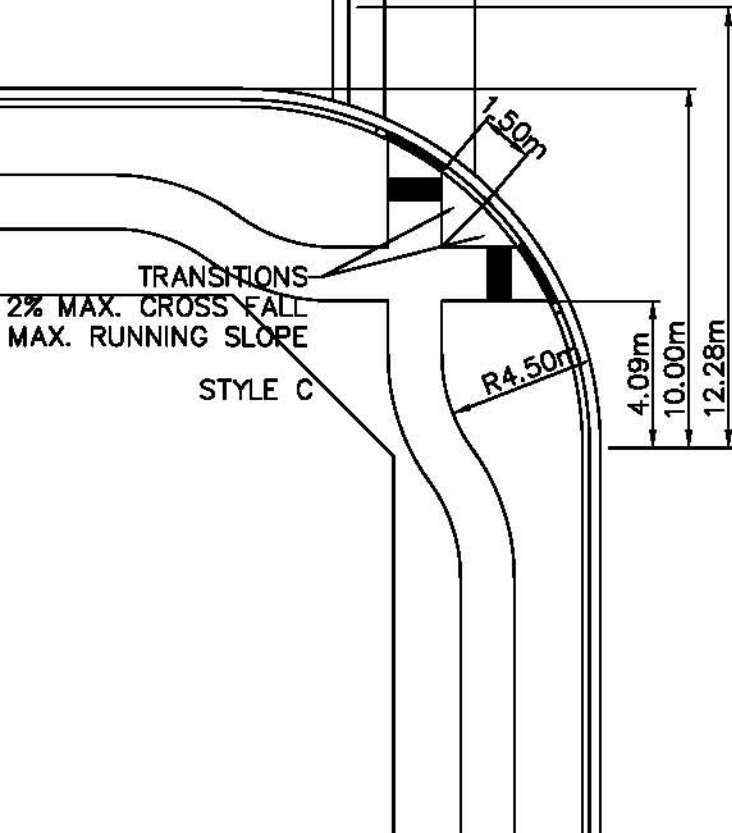

IF CENTRELINE OF SIDEWALK IS BETWEEN CENTRELINE OF BOULEVARD AND CURB, OR THERE IS NOT SUFFICIENT PROPERTY TO INSTALL STYLE "B" OR "C", USE SIDEWALK AGAINST CURB STYLE "A"

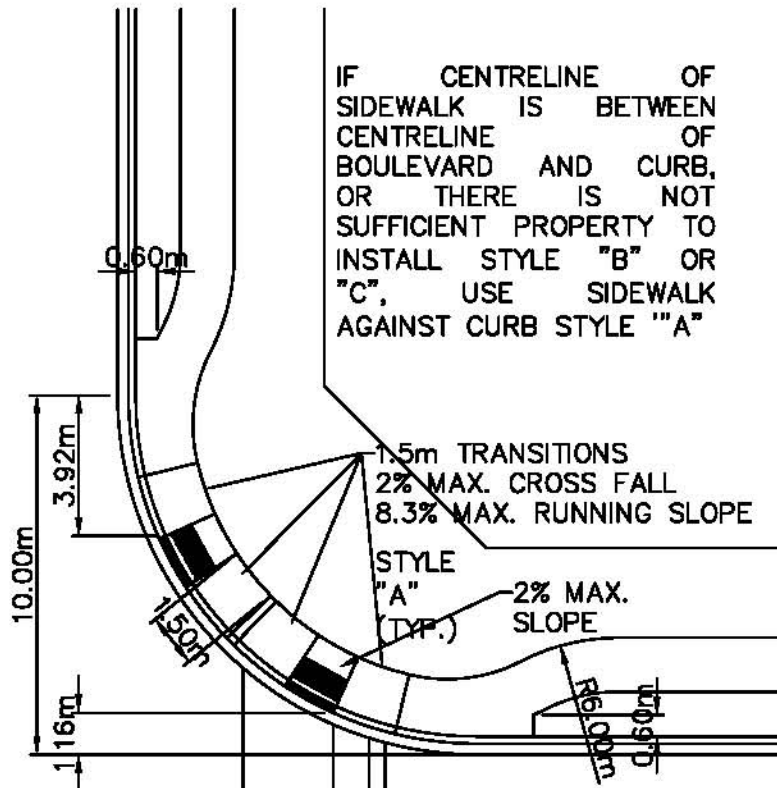

WHEN TRANSITIONING FROM SIDEWALK CLOSER TO CURB AND SIDEWALK AWAY FROM CURB, USE STYLE "A" SO RAMP SLOPES MEET AODA REQUIREMENTS

TITLE:

# SIDEWALK RAMP LOCATIONS - 10M RADIUS

DWG DATE:

FEB 20, 2013

REVISION DATE:

DWG NO:

308

