



IF CENTRELINE OF
SIDEWALK IS BETWEEN
CENTRELINE OF
BOULEVARD AND
PROPERTY LINE
USE STYLE "B OR C"

STYLE B

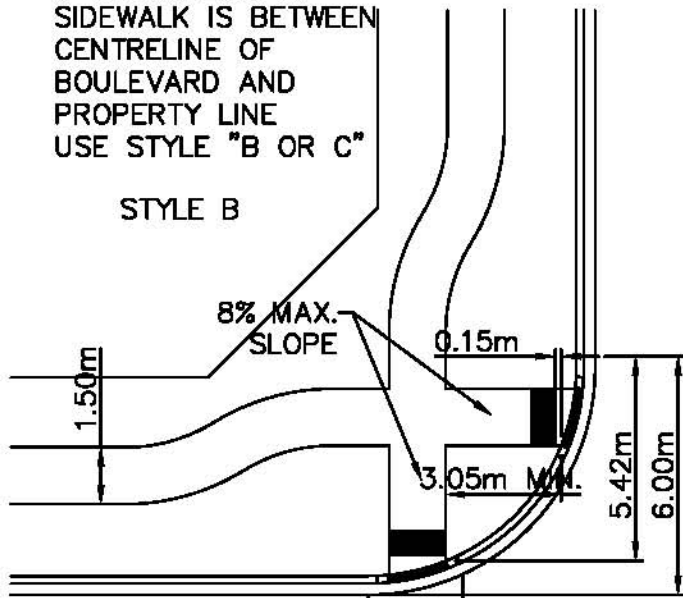

IF CENTRELINE OF
SIDEWALK IS BETWEEN
CENTRELINE OF
BOULEVARD AND CURB,
OR THERE IS NOT
SUFFICIENT PROPERTY
TO INSTALL STYLE "B"
OR "C", USE SIDEWALK
AGAINST CURB STYLE
"A"

1.50m TRANSITIONS
2% MAX. CROSS FALL
8.3% MAX. RUNNING SLOPE

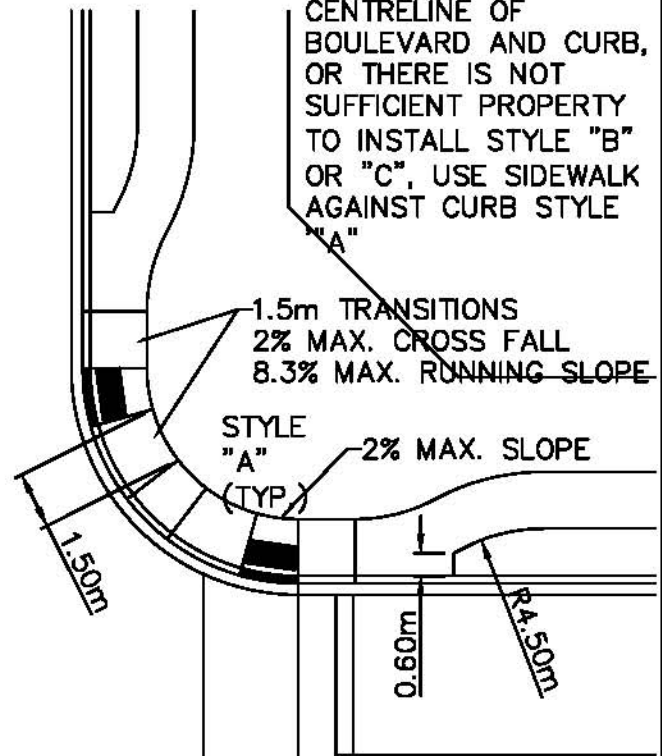

STYLE
"A"
(TYP.) 2% MAX. SLOPE

3.50m MAX.

8% MAX.
SLOPE

1.50m TRANSITION
2% SLOPE

TRANSITIONS
2% MAX. CROSS FALL
10% MAX. RUNNING SLOPE

8% MAX.
SLOPE

R4.50m

STYLE C

R4.50m

STYLE A

WHEN TRANSITIONING
FROM SIDEWALK
CLOSER TO CURB AND
SIDEWALK AWAY FROM
CURB, USE STYLE "A"
SO RAMP SLOPES
MEET AODA
REQUIREMENTS

TITLE:

SIDEWALK RAMP LOCATIONS - 6M RADIUS



DWG DATE:

FEB 20, 2013

REVISION DATE:

DWG NO.:

305