



IF CENTRELINE OF
SIDEWALK IS
BETWEEN
CENTRELINE OF
BOULEVARD AND
PROPERTY LINE USE
STYLE "B OR C"
STYLE B

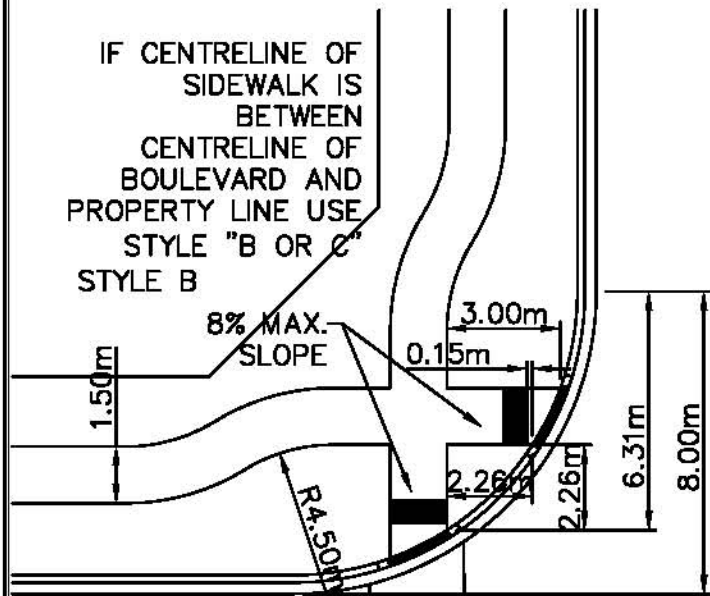

IF CENTRELINE OF
SIDEWALK IS BETWEEN
CENTRELINE OF
BOULEVARD AND CURB,
OR THERE IS NOT
SUFFICIENT PROPERTY
TO INSTALL STYLE "B"
OR "C", USE SIDEWALK
AGAINST CURB
STYLE "A"

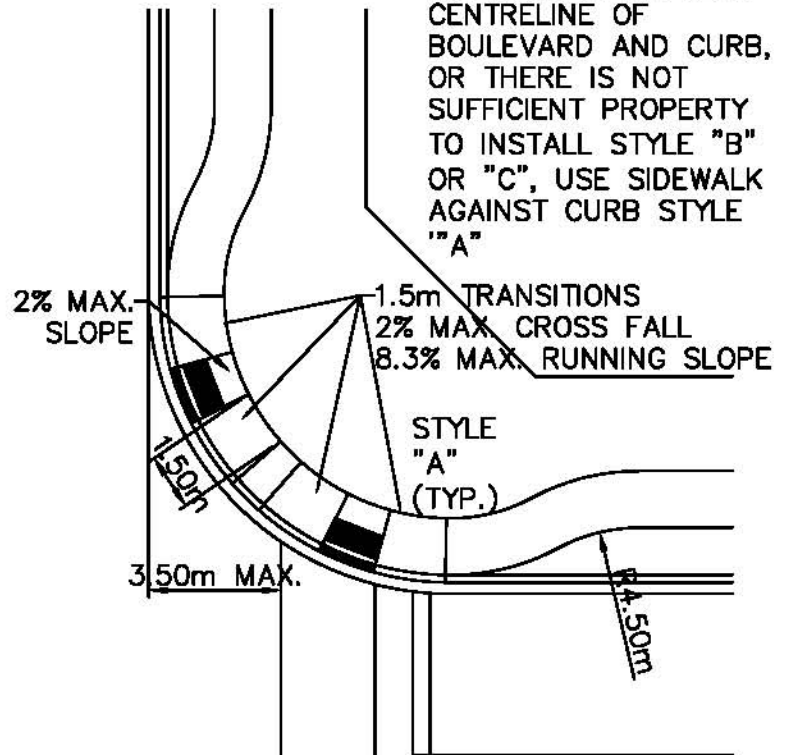

3.50m MAX.

TRANSITIONS
2% MAX. CROSS FALL
8.3% MAX. RUNNING SLOPE

2% MAX.
SLOPE

STYLE C

1.50m

STYLE A

WHEN TRANSITIONING
FROM SIDEWALK CLOSER
TO CURB AND SIDEWALK
AWAY FROM CURB, USE
STYLE "A" SO RAMP
SLOPES MEET AODA
REQUIREMENTS

SIDEWALK RAMP LOCATIONS - 8M RADIUS



DWG DATE:
FEB 20, 2013

REVISION DATE:

DWG NO.:
306